

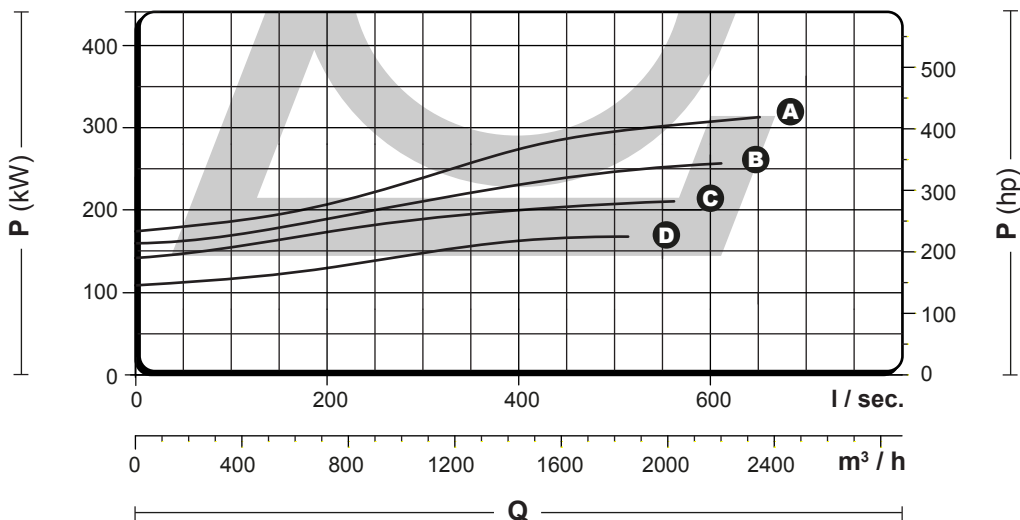


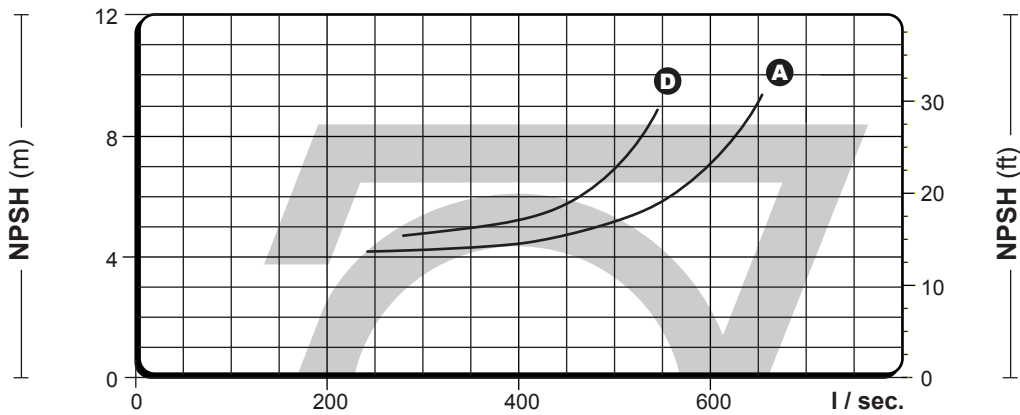

- IMPELLER
- A** = Ø 450 mm
 - B** = Ø 425 mm
 - C** = Ø 400 mm
 - D** = Ø 375 mm

LOW
CAVITATION
IMPELLER



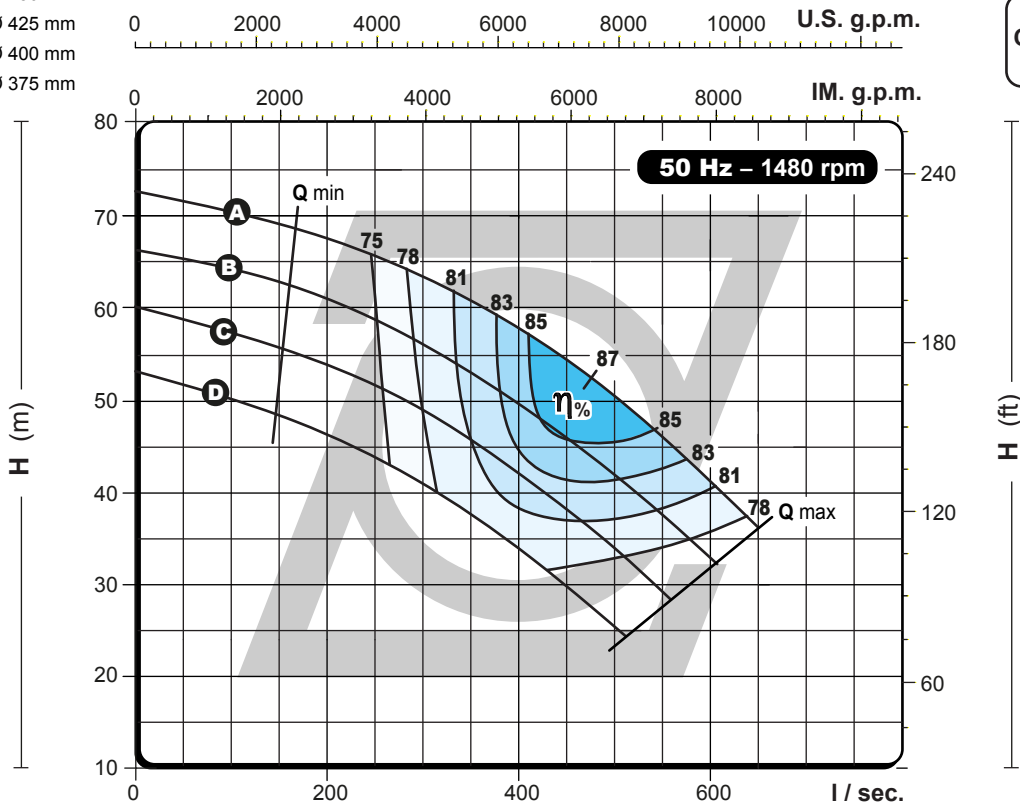


— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

single stage double suction



- IMPELLER
- A** = Ø 700 mm
 - B** = Ø 654 mm
 - C** = Ø 600 mm
 - D** = Ø 550 mm

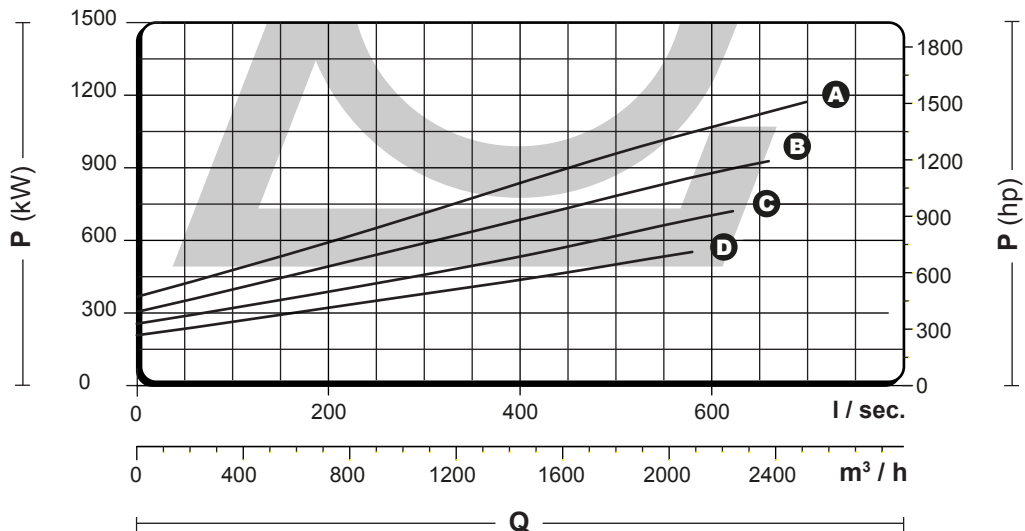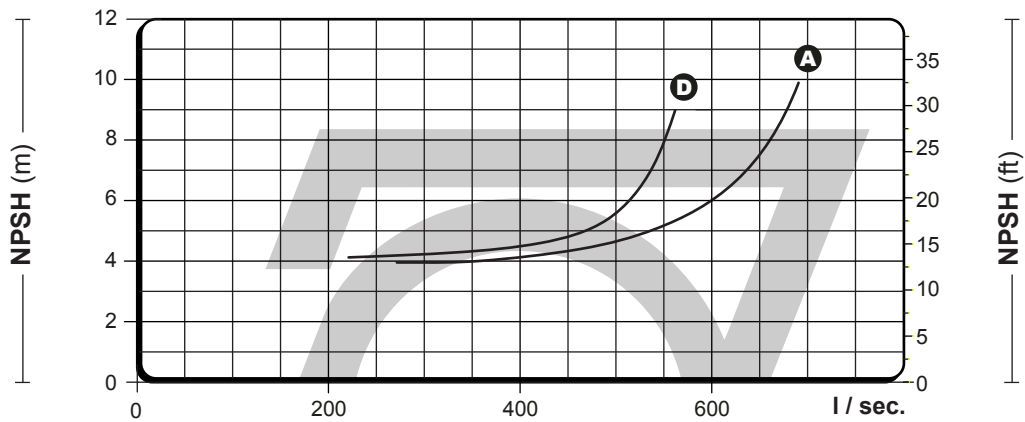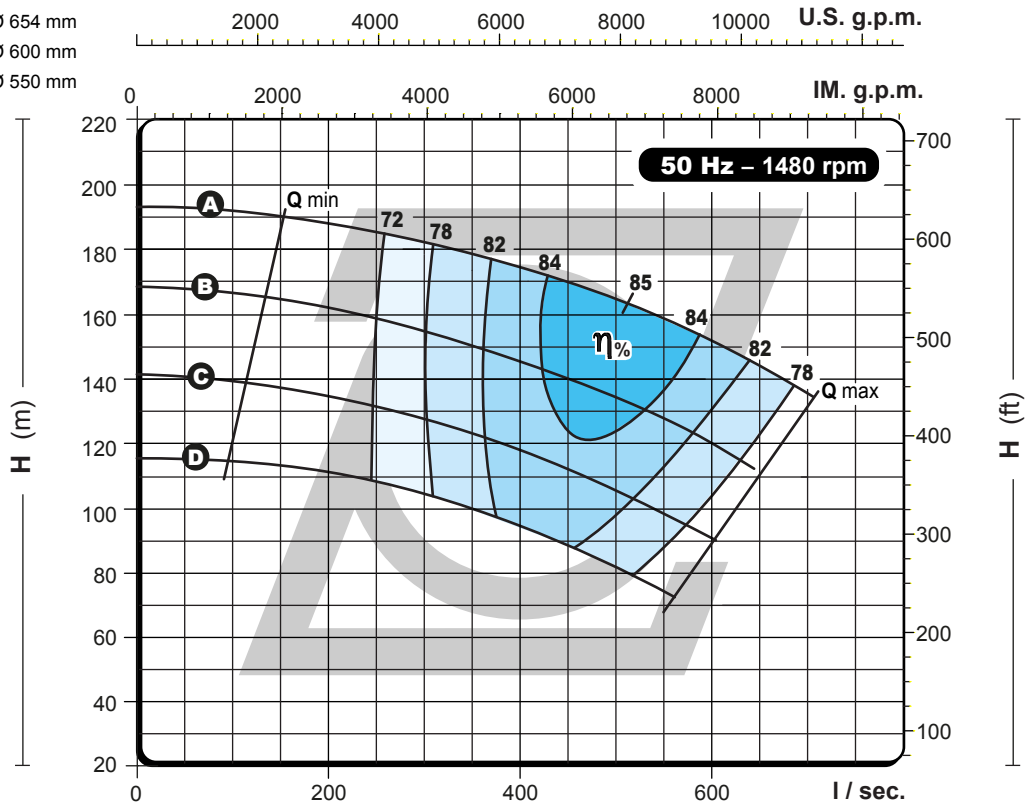

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —




single stage double suction



- IMPELLER
- A** = Ø 580 mm
 - B** = Ø 540 mm
 - C** = Ø 500 mm
 - D** = Ø 460 mm

0 2000 4000 6000 8000 10000 U.S. g.p.m.

0 2000 4000 6000 8000 IM. g.p.m.

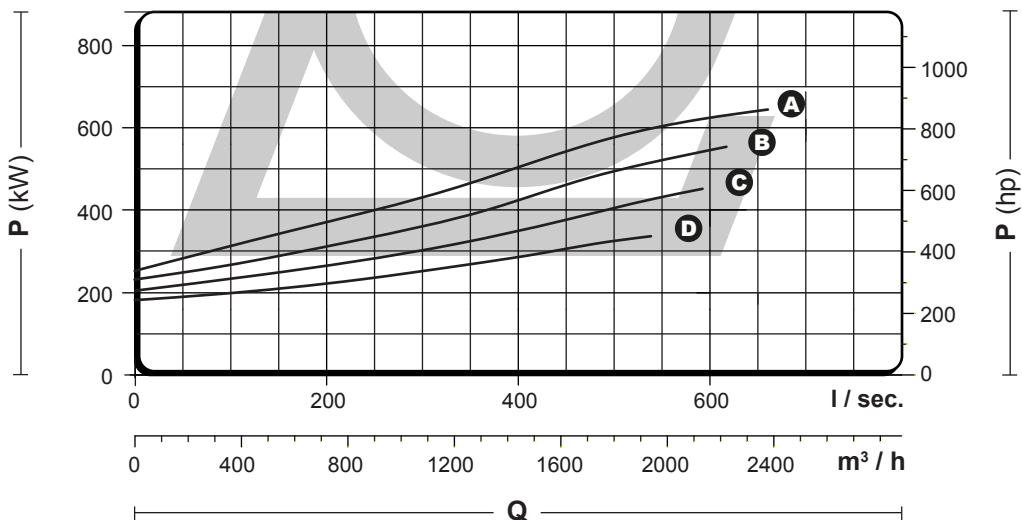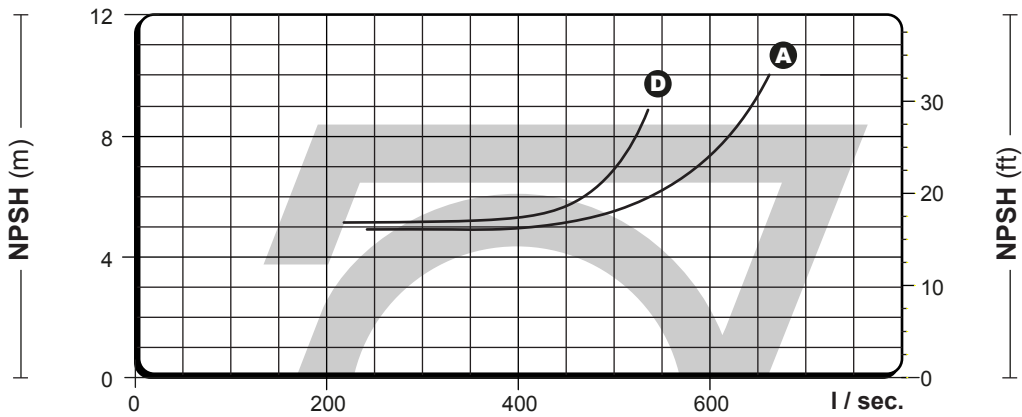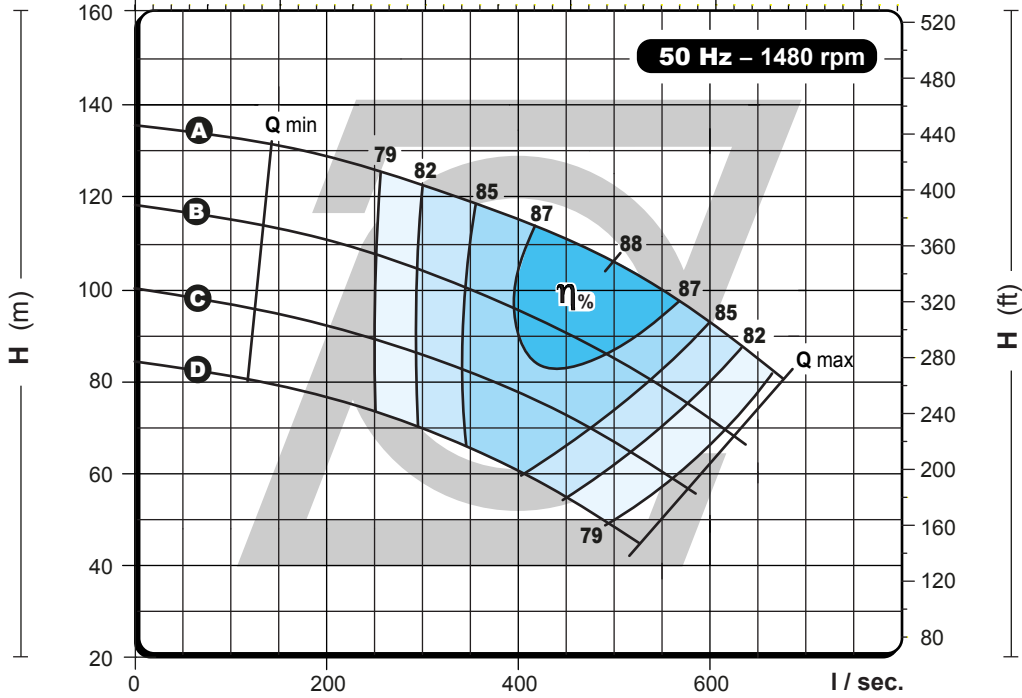


— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

single stage double suction



- IMPELLER
- A** = Ø 450 mm
 - B** = Ø 425 mm
 - C** = Ø 400 mm

HIGH EFFICIENCY IMPELLER

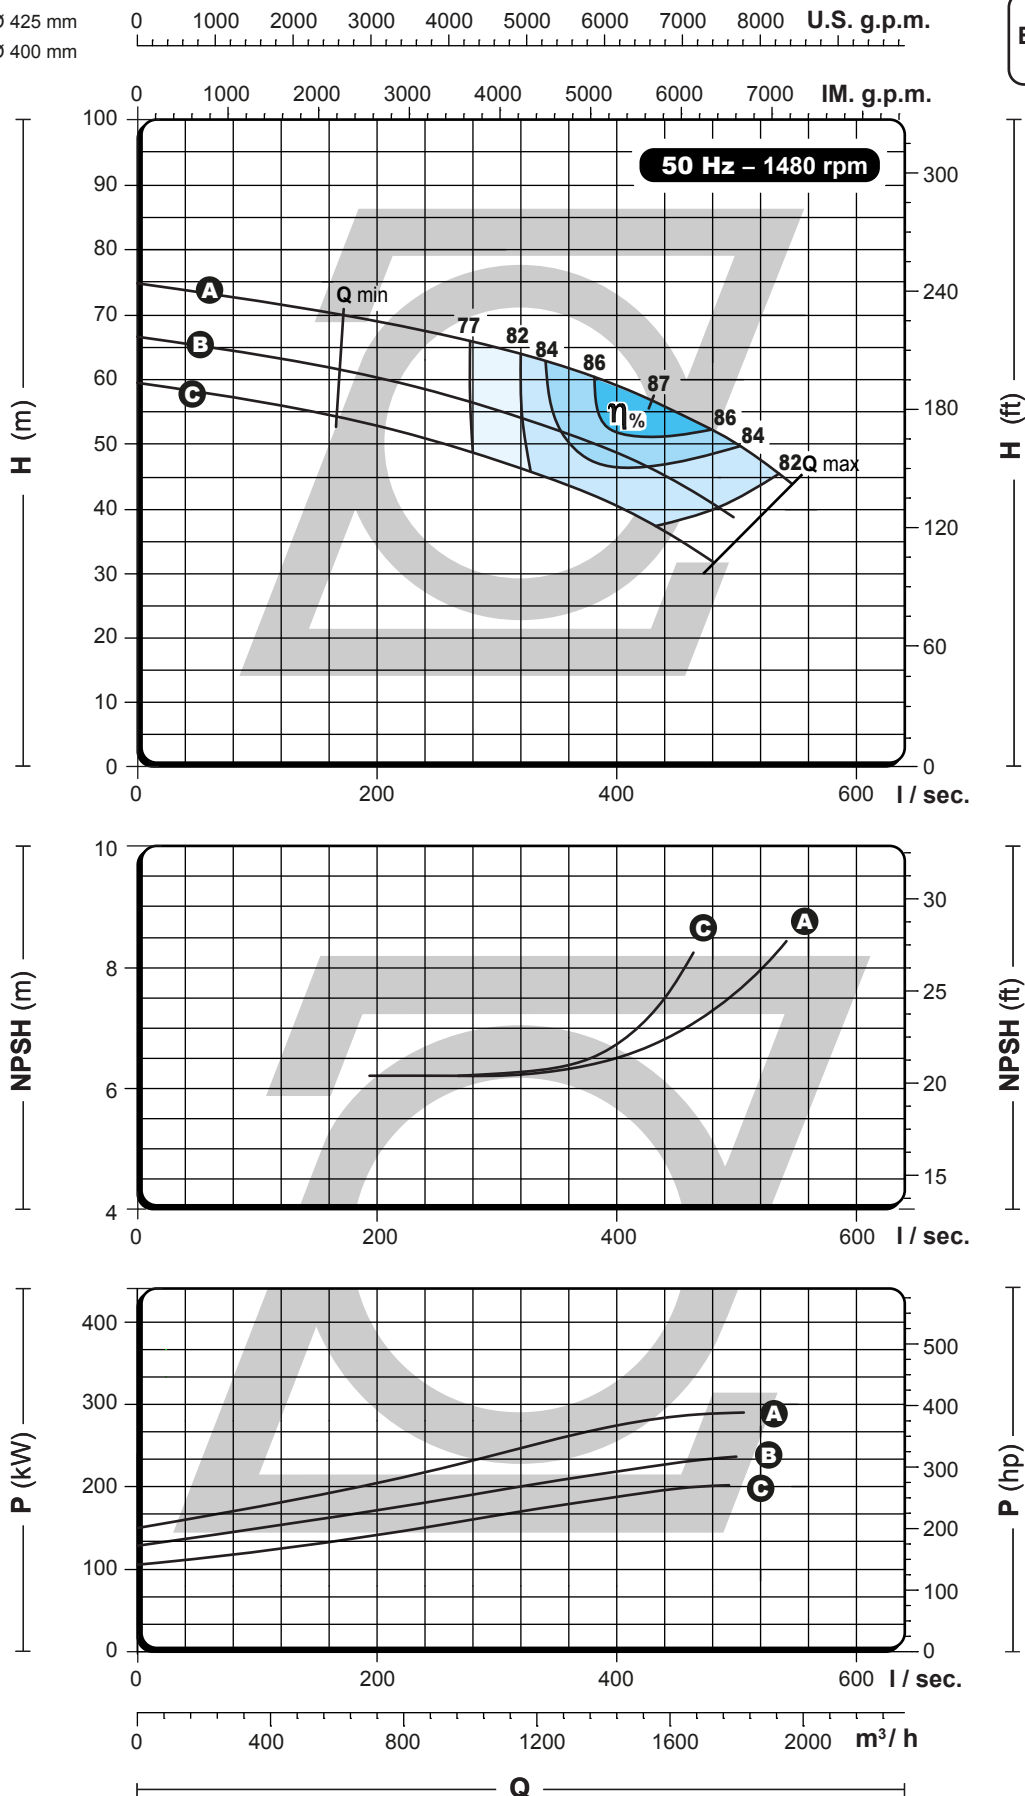

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

single stage double suction