




- IMPELLER
- A = Ø 610 mm
  - B = Ø 560 mm
  - C = Ø 510 mm

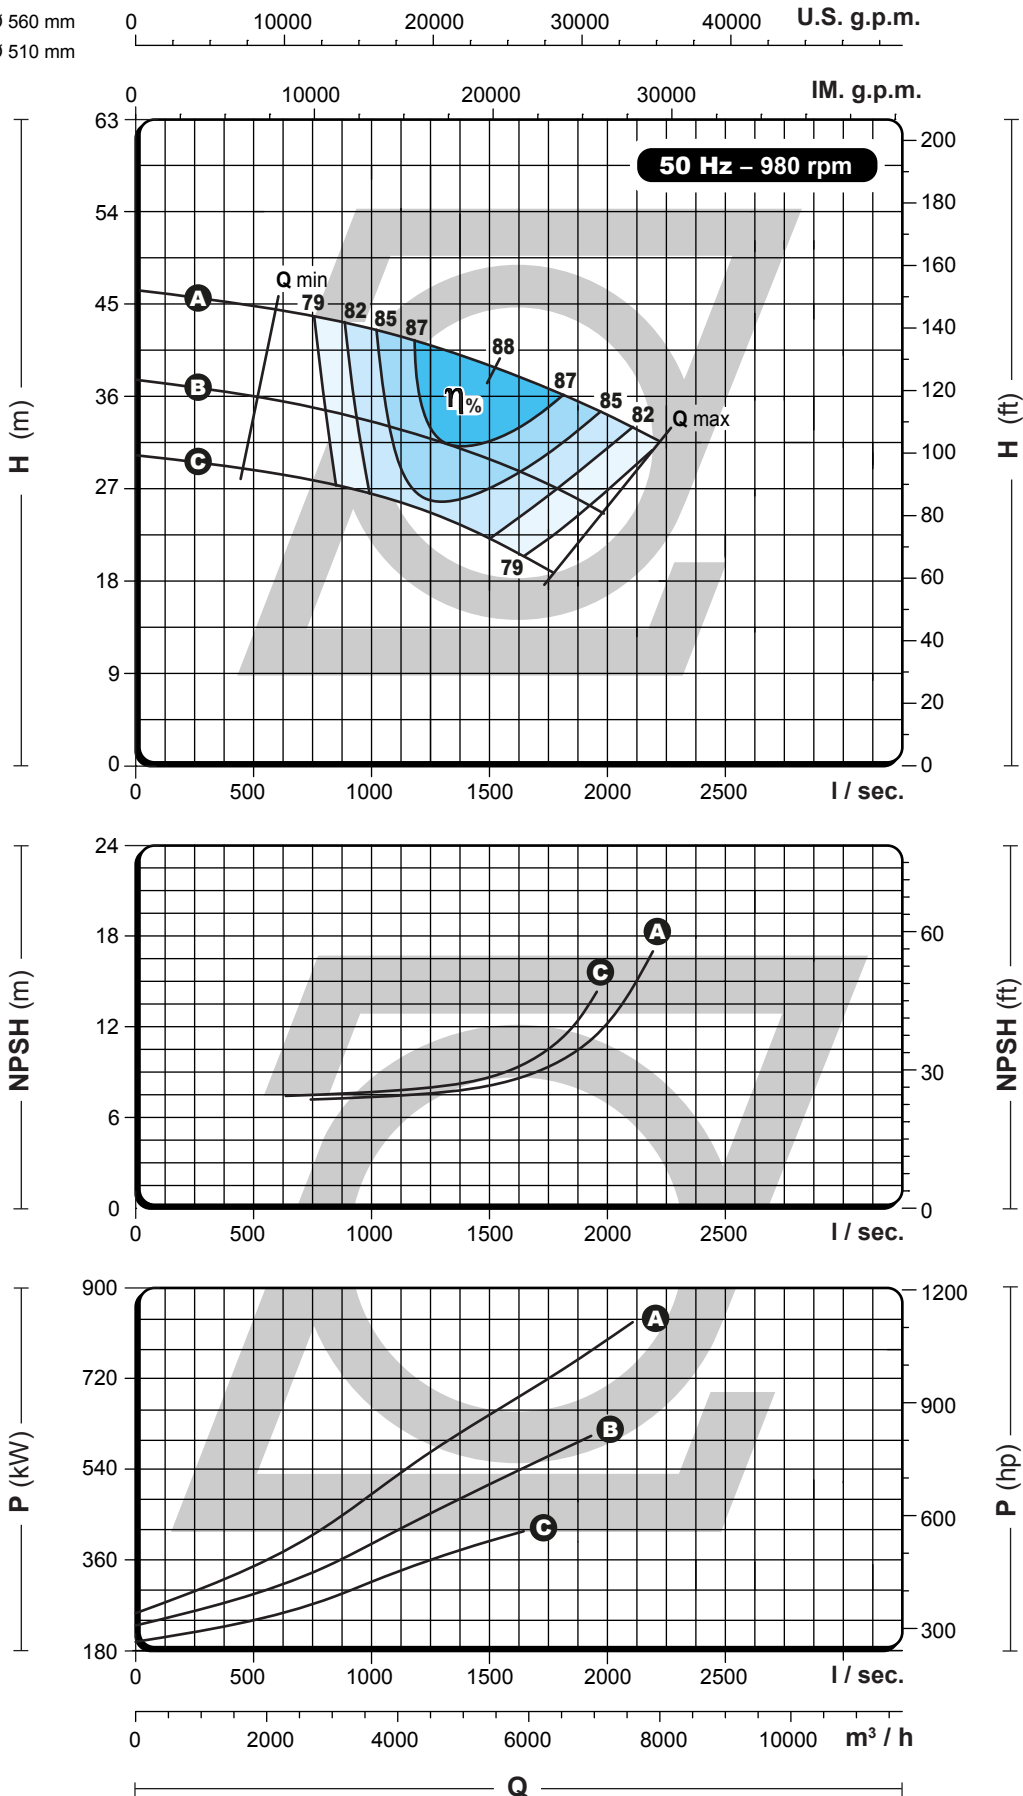

— Head and power ratings apply to media with a density of  $\rho = 1 \text{ kg/dm}^3$  and kinetic viscosity of  $20 \text{ mm}^2/\text{s}$  —




single stage double suction



- IMPELLER
- A = Ø 702 mm
  - B = Ø 680 mm
  - C = Ø 650 mm
  - D = Ø 620 mm
  - E = Ø 590 mm

0 8000 16000 24000 32000 U.S. g.p.m.

0 8000 16000 24000 IM. g.p.m.

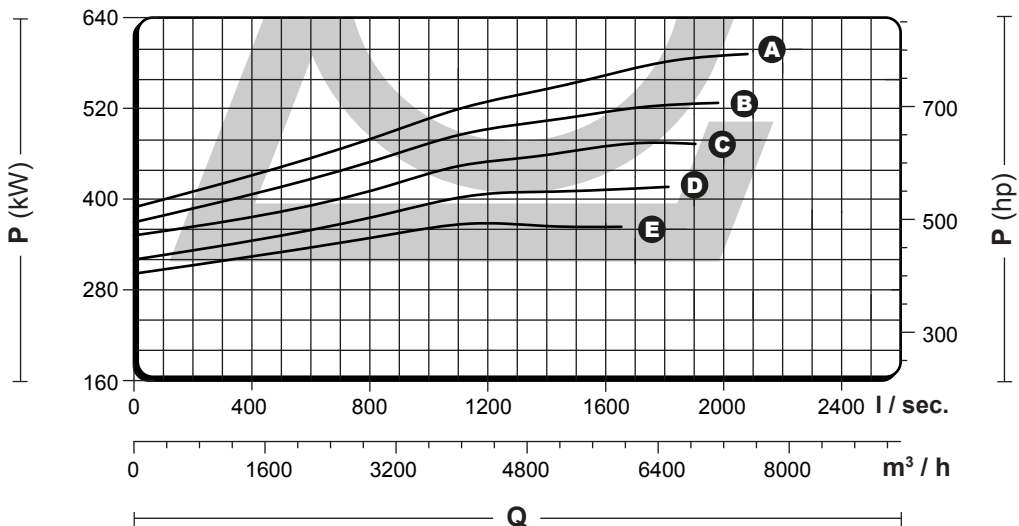
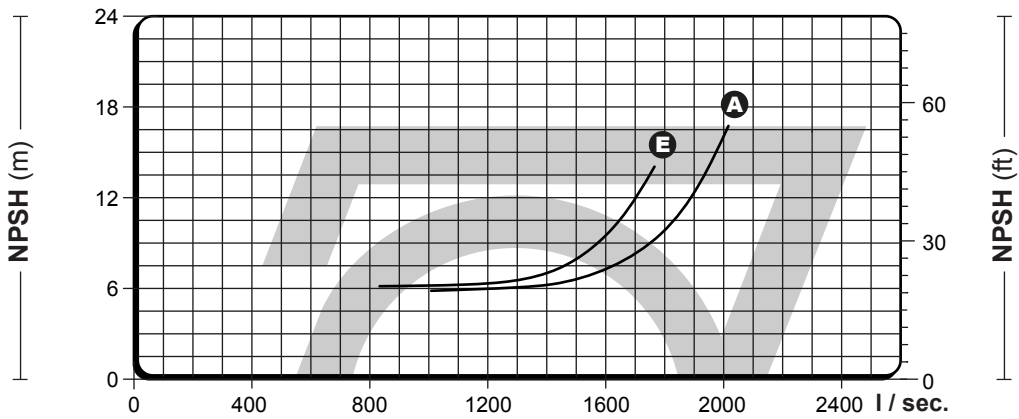
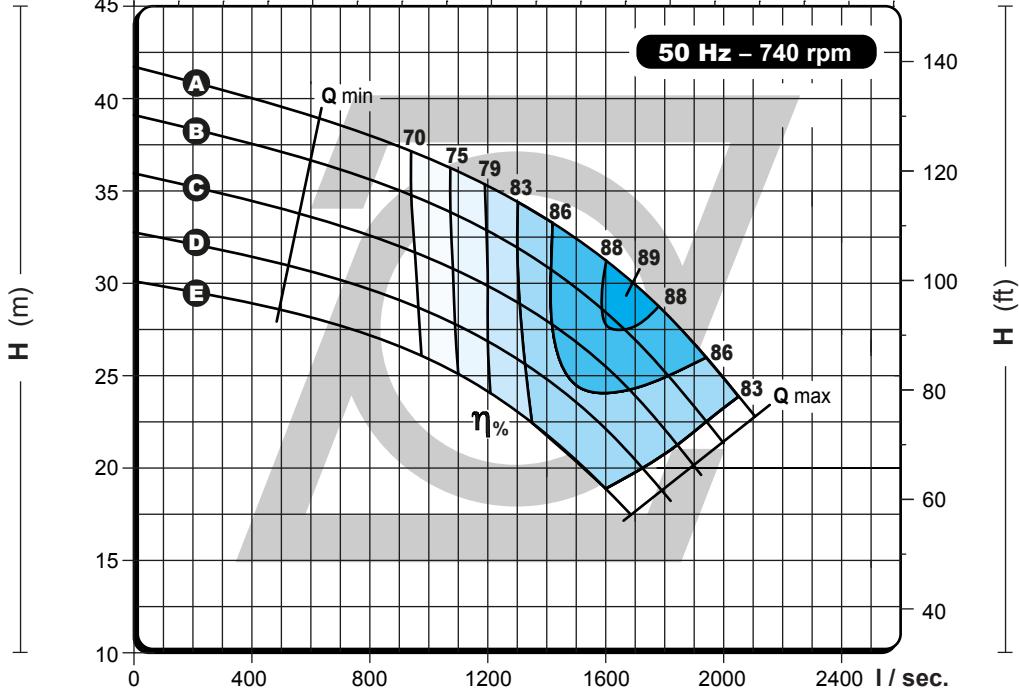


— Head and power ratings apply to media with a density of  $\rho = 1 \text{ kg/dm}^3$  and kinetic viscosity of  $20 \text{ mm}^2/\text{s}$  —

single stage double suction



- IMPELLER
- A** = Ø 782 mm
  - B** = Ø 750 mm
  - C** = Ø 730 mm
  - D** = Ø 690 mm

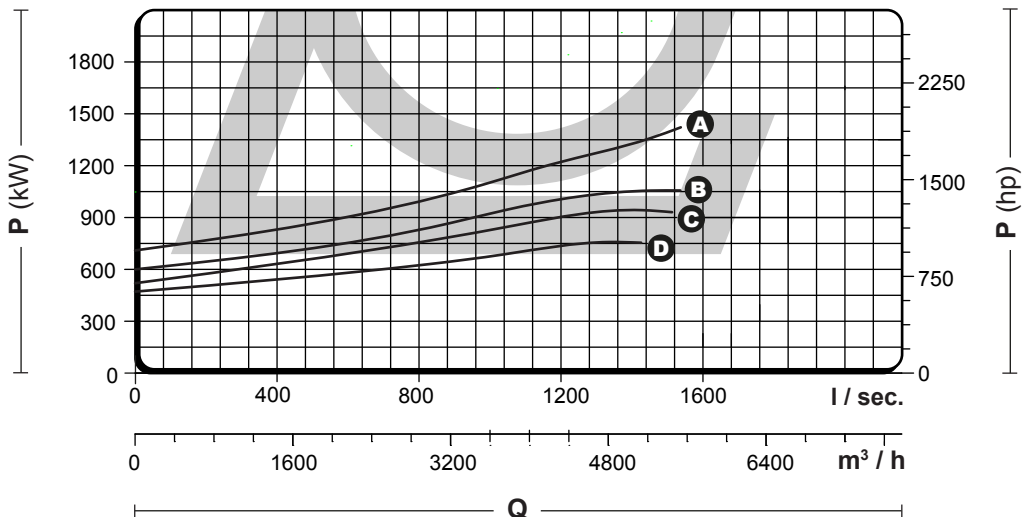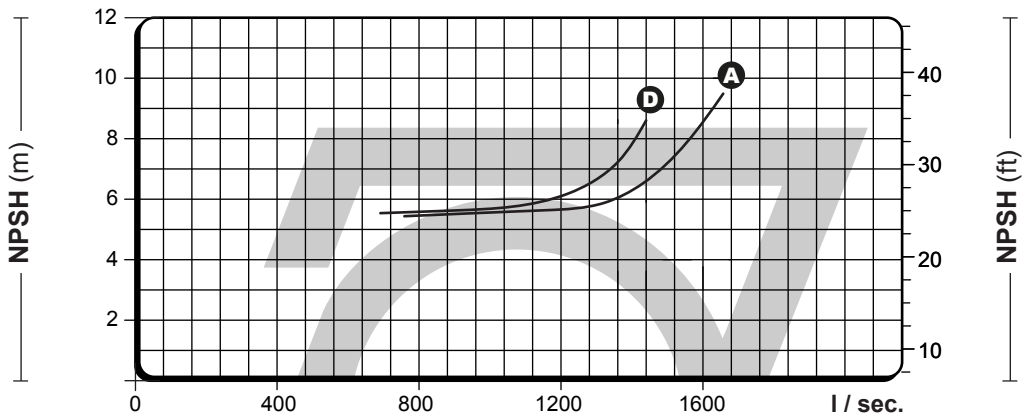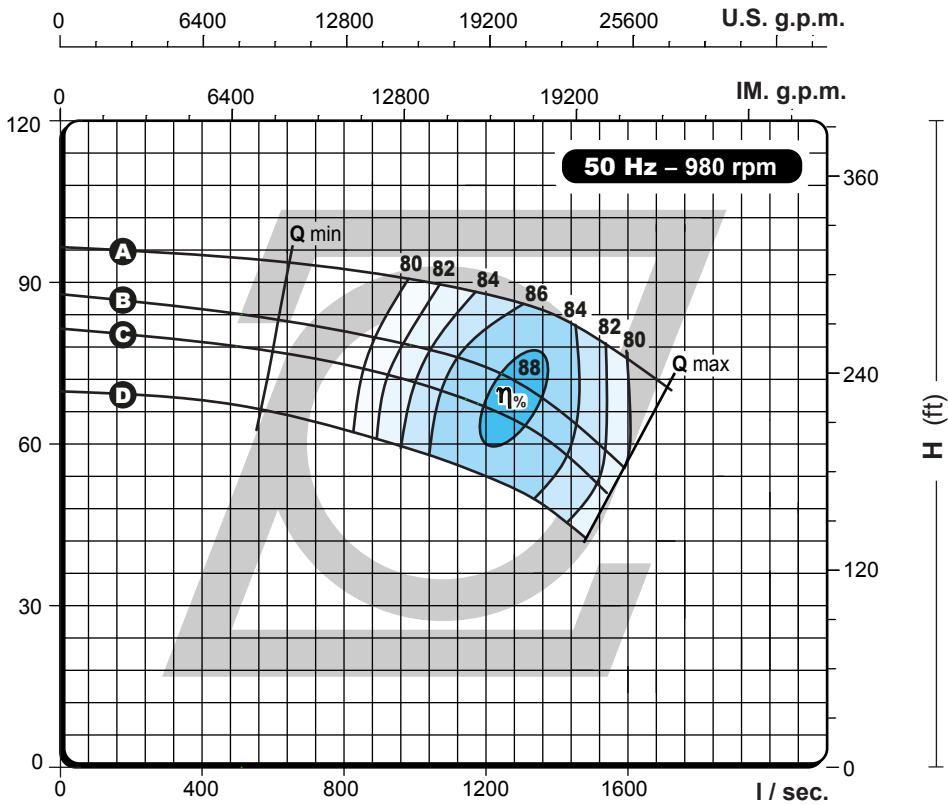

— Head and power ratings apply to media with a density of  $\rho = 1 \text{ kg/dm}^3$  and kinetic viscosity of  $20 \text{ mm}^2/\text{s}$  —

single stage double suction