

Pump Type	kW	Q	m³/h	0	162	321	483	645	804	966	1128	1287	1449
			l/sec	0	45.0	89.2	134.2	179.2	223.3	268.3	313.3	357.5	402.5
			l/min	0	2700	5350	8050	10750	13400	16100	18800	21450	24150


Pump Type	kW	H (m)	P1 (kW)	H	46.9	45.5	44.4	43.3	41.6	38.9	34.7	--	--	--
				P1	54.2	64.9	75.3	85.7	95.7	104.9	113.6	--	--	--
PZ2214/50/1L	132			H	46.9	45.5	44.4	43.3	41.6	38.9	34.7	--	--	--
				P1	54.2	64.9	75.3	85.7	95.7	104.9	113.6	--	--	--
PZ2214/50/1F	160			H	55.0	53.5	52.5	51.4	50.0	48.0	45.1	40.8	--	--
				P1	73.4	85.7	97.8	109.9	121.7	132.9	143.6	153.6	--	--
PZ2214/50/1C	200			H	61.1	59.6	58.4	57.4	56.1	54.5	52.1	48.7	44.2	--
				P1	89.5	103.0	116.3	129.7	142.8	155.3	167.5	179.0	189.6	--
PZ2214/60/1	250			H	64.9	63.4	62.3	61.2	60.1	58.6	56.4	53.5	49.5	44.2
				P1	101.3	115.7	129.8	144.1	158.1	171.5	184.7	197.2	208.8	219.9
PZ2214/60/2L	250			H	93.9	91.0	88.9	86.6	83.1	77.8	69.4	--	--	--
				P1	108.4	129.7	150.6	171.3	191.3	209.8	227.3	--	--	--
PZ2214/60/2F	315			H	110.0	107.1	104.9	102.7	100.0	96.1	90.1	81.6	--	--
				P1	146.8	171.5	195.6	219.8	243.4	265.7	287.2	307.3	--	--
PZ2214/60/2C	400			H	122.1	119.1	116.9	114.8	112.3	109.0	104.2	97.4	88.3	--
				P1	179.0	206.1	232.6	259.4	285.6	310.6	335.0	358.0	379.2	--
PZ2214/70/2	450			H	129.9	126.9	124.6	122.5	120.1	117.1	112.9	106.9	99.0	88.4
				P1	202.6	231.4	259.6	288.1	316.2	343.0	369.3	394.4	417.7	439.7
PZ2214/70/3H	375			H	149.1	144.7	141.5	138.1	133.4	126.3	115.2	--	--	--
				P1	181.3	215.0	248.0	280.9	312.8	342.5	370.8	--	--	--
PZ2214/70/3F	500			H	165.1	160.6	157.4	154.1	150.0	144.1	135.2	122.5	--	--
				P1	220.2	257.2	293.4	329.7	365.2	398.6	430.8	460.9	--	--
PZ2214/70/3D	560			H	179.6	175.2	171.8	168.6	164.9	159.8	152.3	141.7	127.5	--
				P1	258.8	298.7	337.8	377.2	415.8	452.5	488.2	522.0	552.8	--
PZ2214/70/3A	630			H	190.8	186.2	182.8	179.7	176.1	171.5	164.8	155.5	143.1	--
				P1	291.2	333.5	375.0	416.9	458.0	497.2	535.7	572.3	606.1	--

H: total manometer head.  
P1: power absorbed from the pump.

## — ACCESSORIES FEATURES —

Motor power kW	Motor Size	Axis line	Drive unit	Base	Flange discharge	Foot valve	Strainer
110 - 132	315	LA 14/50	ME350.8/50	PZ 350	DN 400 - PN 25	—	SU12"
160 - 200							
250 - 280							
315	355	LA 14/60	ME350.9/60	PZ 350	DN 400 - PN 25	—	SU12"
355 - 400			ME350.10/60				
450 - 500	400	LA 14/70	ME350.10/70	PZ 350	DN 400 - PN 25	—	SU12"
560 - 630			ME350.10/80				
710			ME350.10/80				

22 INCH

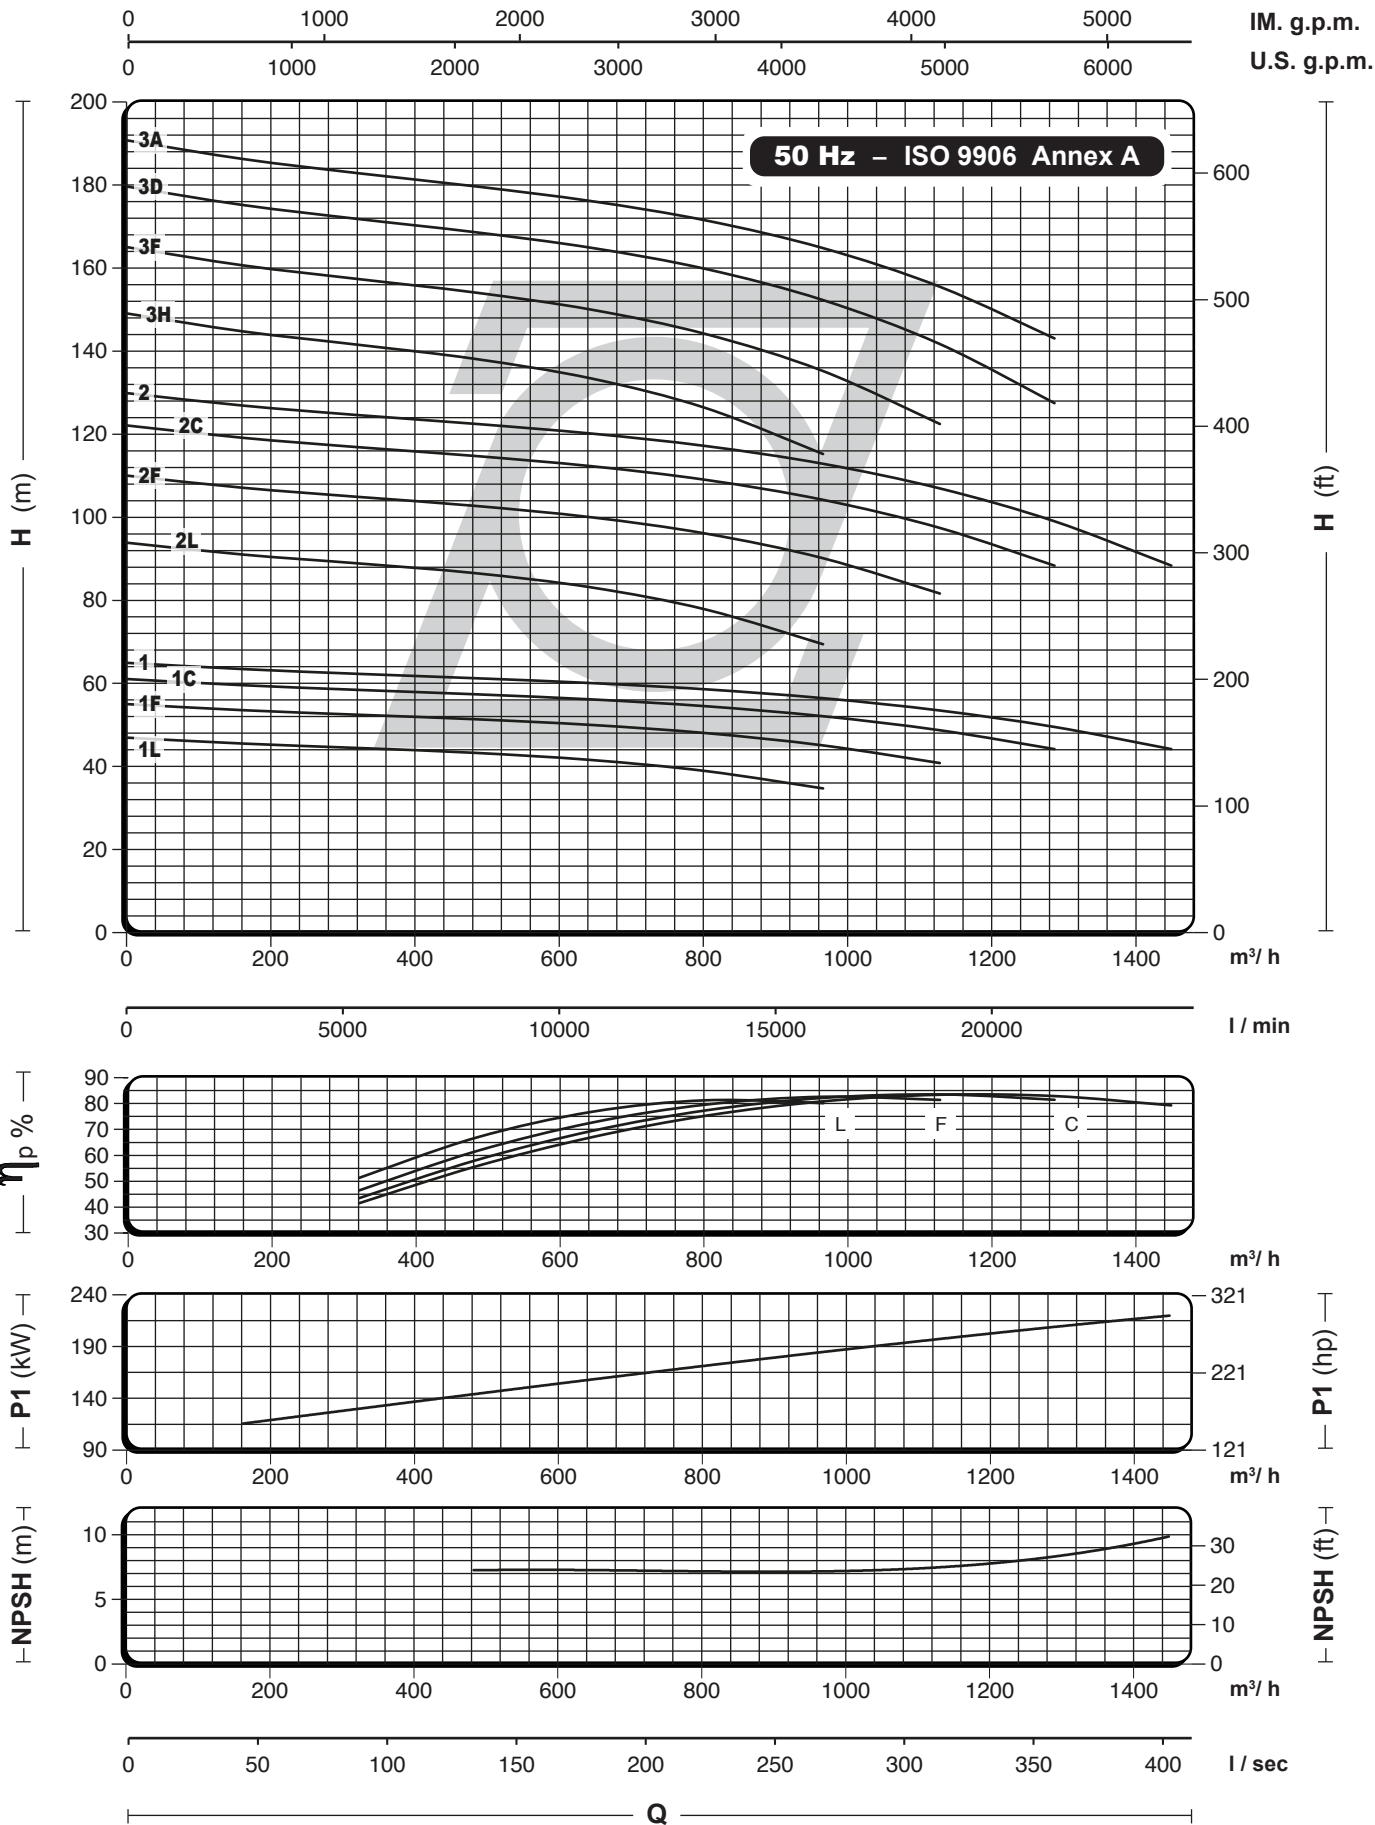

22 INCH